


SOLDER TO HDMI CONNECTOR FOR DISCRETE WIRES

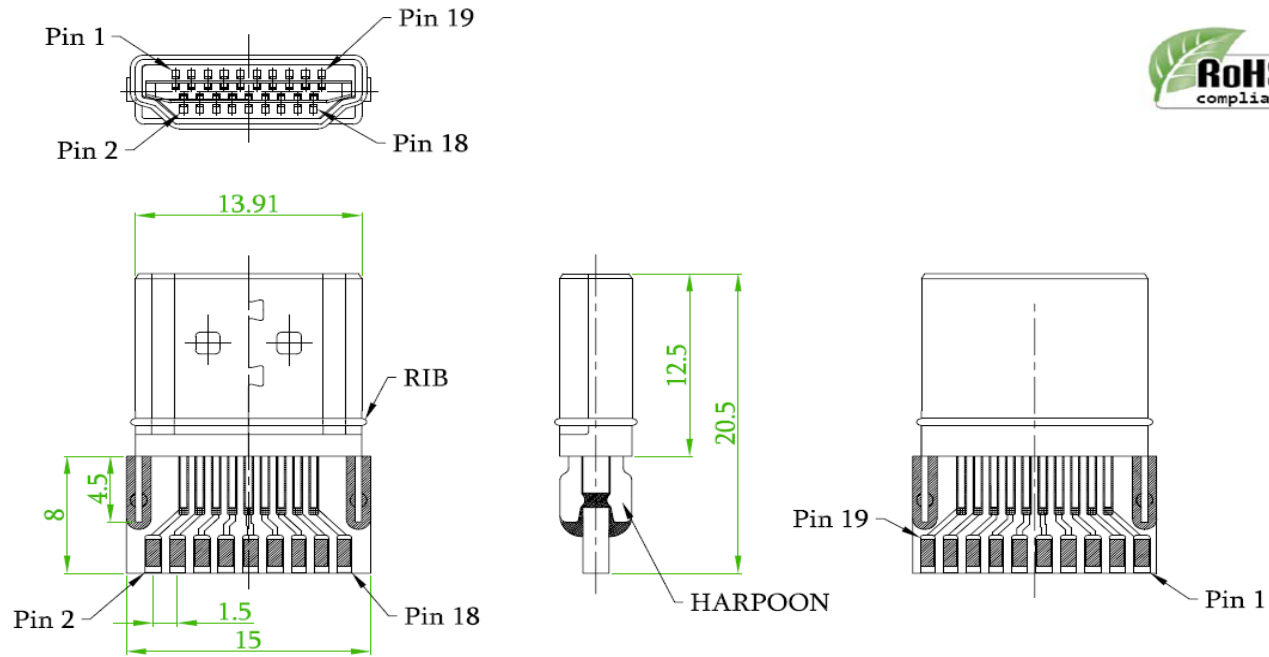

UNITS: mm

SPECIFICATION

Current Rating: 0.5 AMP
Insulation Resistance: 100M Ω Min
Contact Resistance: 30m Ω Max
Dielectric Voltage: 300VAC for one minute

Insertion Force: 4.5Kgf Max.
Extraction Force: 1.0 Kgf Min.
Operation Temperature: -25°C to +85°C

MATERIAL

Insulator: PBT+30%G.F, UL94V-0
Contact: Copper Alloy
Shell: Stainless Steel

DWG BY: PT		DATE: 7/3/18	DRAWINGS ARE NOT TO SCALE. ALL DIMENSIONS ARE IN INCHES UNLESS OTHERWISE SPECIFIED. ALL TOLERANCES ARE +/- 0.50" UNLESS OTHERWISE SPECIFIED	
CHK BY:		DATE: 7/3/18		
APPR: -		DATE: 7/3/18		
REVISION HISTORY				
REV			DATE	APPROVED
---	Initial Release		7/3/18	PT



Quadrangle Products Inc.

Quadrangle Products Inc.
28 Harrison Ave Suite 105, Englishtown,
NJ 07726

Tel: 732-792-1234
Fax: 732-792-8305

© Copyright 2006 Quadrangle Products Inc.
This document is confidential and proprietary to Quadrangle Products Inc. and shall not be reproduced, copied, used, or issued as the basis of manufacturing and/or sale of equipment, material, or any other item. Quadrangle Products Inc. has the sole and exclusive ownership rights to this document and information contained herein.

**SOLDER TO
HDMI
CONNECTOR**